

Аксессуары

Описание

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04


Беларусь +375-257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: mce@nt-rt.ru || сайт: <https://cem.nt-rt.ru/>

WRNM-1503




WRNM-1501




WRN-01D




WRN-01CF



WRN-01BF



WRF-02BLJ



TL-901




Specification: 1200mm,PVC
Diameter: Φ 4mm
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A

TL-204



Diameter: Φ 4mm
Voltage Rate: CAT II 1000V / CAT III 600V
Current Rate: 10A

SD-9904



Specification: 1000mm,PVC
Diameter: Φ 4mm
Voltage Rate: 5000VDC Hands-Free,
70VDC Handheld
Current Rate: 15A Max

SD-9903B



Specification: 1000mm,PVC
Voltage Rate: CAT III 1000V
Current Rate: 10A MAX

SD-9903A



Specification: 1000mm,PVC
Voltage Rate: CAT III 1000V
Current Rate: 10A MAX

SD-9902



Specification: 1000mm,PVC
Diameter: Φ 4mm
Voltage Rate: 150V DC
Current Rate: 5A MAX

SD-9901



Specification: 1000mm,PVC
Voltage Rate: 150V DC
Current Rate: 5A MAX

SD-9831



Specification: 1200mm,PVC
Diameter: Φ 4mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

SD-9830




Diameter: Φ 4mm
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A

SD-9829




Diameter: Φ 4mm
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A

SD-9828




Diameter: Φ 4mm
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A

SD-9826B




Specification: 1000mm,PVC
Diameter: Φ 4mm
Voltage Rate: CAT II 300V
Current Rate: 5A

SD-9826A



Specification: 1000mm,PVC
Diameter: Φ 4mm
Voltage Rate: CAT II 300V
Current Rate: 5A

FC-A23C




Specification: 900mm,PVC
Diameter: Φ 4mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

FC-A23B



Specification: 900mm,PVC
Diameter: $\Phi 4$ mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

FC-170A



Diameter: $\Phi 4$ mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

FC-28-A



Diameter: $\Phi 4$ mm
CAT III 1000V
5A

TP-150




CF-735140




Diameter: $\Phi 4$ mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

SC-9905



Diameter: $\Phi 4$ mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

CF-734770-A




Diameter: $\Phi 4$ mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

CF-733781



Specification: 500mm,PVC
Diameter: $\Phi 4$ mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

CF-733760



Specification: 1000mm,PVC
Diameter: $\Phi 4$ mm
Voltage Rate: CAT III 1000V
Current Rate: 16A

CF-732280-A



Specification: 1000mm,PVC
Diameter: $\Phi 4$ mm
Voltage Rate: CAT II 1000V
Current Rate: 8A

2K-106



FC-92



CF-733783




Diameter: $\Phi 2$ mm
Voltage Rate: CAT II 300V
Current Rate: 3A

CF-733784




Diameter: $\Phi 2$ mm
Voltage Rate: CAT II 300V
Current Rate: 3A

TP-250



TP-200




FC-300



CF-735180-1



FC-735180




CF-734760



CF-735000



CF-732280



FC-A26



CF-734990



MB-1



MB-2




MB-3




MB-8



FC-98A




TL-88-1



TL-88-4




TL-99-1




FC-96B




FC-108




FC-138



FC-136




FC-49



CE ®

FC-209D




Specification: 1200mm,PVC
Diameter: Φ 4mm
CAT III 1000V / CAT IV 600V
Current Rate: 10A

FC-107



Specification: 1200mm,PVC
Diameter: Φ 4mm
CAT III 1000V
Current Rate: 10A

FC-204




FC-178A




Diameter: Φ 4mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

FC-106



Diameter: Φ 4mm
Voltage Rate: CAT III 600V
Current Rate: 10A

FC-105A



CE ®

Diameter: Φ 4mm
Voltage Rate: CAT III 600V
Current Rate: 10A

FC-105



Diameter: Φ 4mm
Voltage Rate: CAT III 600V
Current Rate: 10A

FC-109




Diameter: Φ 4mm
Voltage Rate: CAT II 300V
Current Rate: 5A

FC-210



Diameter: Φ 4mm
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A


FC-A18



FC-A17




FC-206



Diameter: Φ 4mm
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A

FC-28



Diameter: Φ 4mm
Voltage Rate: CAT II 1000V
Current Rate: 5A

FC-A24




FC-A23




Diameter: Φ 4mm
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A

FC-209C



Diameter: Φ 4mm
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A


FC-6R



FC-6Y




FC-A31




FC-A12

FC-A30

FC-A15


Diameter: $\Phi 4\text{mm}$
Voltage Rate: CAT III 1000V
Current Rate: 10A


FC-209





Diameter: $\Phi 4\text{mm}$
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A



TL-118B


Specification: 1200mm,PVC
Diameter: $\Phi 4\text{mm}$
Voltage Rate: CAT III 1000V / CAT IV 600V
Current Rate: 10A


CP-20

NR-886B

TP-300

TCP-100

TP-500

NR-35

NR-37

NR-31B

NR-33

USB-8852

BNC-1011

M-1

M-125


TR-1

SP-1

SP-2

SP-3


TP-304



TP-306



TP-307



CF-735130



Specification: 1000mm,PVC
Diameter: Φ4mm
Voltage Rate: CAT III 600V
Current Rate: 6A

CF-735750




Specification: 1000mm,PVC
Diameter: Φ4mm
Voltage Rate: CAT III 1000V
Current Rate: 16A

NR-34A



NR-34B




NR-38



FC-732700




TL-601



M-530




TL-533




Specification: 15300mm,PVC
Diameter: Φ4mm
Voltage Rate: CAT II 300V

TL-905



Diameter: Φ4mm
Voltage Rate: CAT III 1000V
Current Rate: 10A

TL-532




Diameter: Φ4mm
Voltage Rate: CAT II 300V
Current Rate: 5A


TL-531



TL-534



TL-650



TL-605




PW-110



SL-852



TL-210




Specification: 610mm,PVC
Voltage Rate: 300V CAT II
Current Rate: 5A

TL-A014



Diameter: $\Phi 4\text{mm}$
Voltage Rate: Hand-held ratings – 30 VAC/60
DVC MAX.Hand free ratings –
2500 working VDC
Current Rate: 15A

TL-A014-1



TL-A015-1



TL-A015



Diameter: $\Phi 4\text{mm}$
Voltage Rate: Hand-held ratings – 30 VAC/60
DVC MAX.Hand free ratings –
2500 working VDC
Current Rate: 15A

TL-A016



Diameter: $\Phi 4\text{mm}$
Voltage Rate: 5000 Vrms Max.For CE
compliance: not intended for hand-held use at
voltage above 33 Vrms / 70 Vdc
Current Rate: 15A

TL-A017



Diameter: $\Phi 4\text{mm}$
Voltage Rate: 5000 Vrms Max.For CE
compliance: not intended for hand-held use at
voltage above 33 Vrms / 70 Vdc
Current Rate: 15A

TL-A024A



Voltage Rate: 30 VAC/60 VDC Max for
hand-held
300 VDC Max for hand free
Current Rate: 5A

TL-A024B



Voltage Rate: 30 VAC/60 VDC Max for
hand-held 300 VDC Max for
hand free
Current Rate: 5A

TL-213



Diameter: $\Phi 4\text{mm}$
Voltage Rate: 300 Vrms/DC
Current Rate: 5A

TL-214



Specification: 50 Ohms for BNC
Diameter: BNC
300 Vrms

TL-B005



Specification: 50 Ohms
Diameter: BNC
Voltage Rate: Shield/Earth: 30 VAC /
60 VDC Max
Inner conductor/Shield: 500 Vrms Max

TL-B006



Specification: 50 Ohms
Diameter: BNC
Voltage Rate: Shield/Earth: 30 VAC /
60 VDC Max Inner conductor/
Shield: 500 Vrms Max

TL-B007



Specification: 50 Ohms
Diameter: BNC
Voltage Rate: Shield/Earth: 30 VAC /
60 VDC Max Inner conductor/
Shield: 500 Vrms Max

TL-B008



Specification: 50 Ohms
Diameter: BNC / $\Phi 4\text{mm}$
Voltage Rate: 500 Vrms Max 30 VAC /
60 VDC Max for hand-held

TL-B009



Specification: 50 Ohms
Diameter: BNC / $\Phi 4\text{mm}$
Voltage Rate: 500 Vrms Max 30 VAC /
60 VDC Max for hand-held

TL-B010



Specification: 50 Ohms
Diameter: BNC / $\Phi 4\text{mm}$
Voltage Rate: 500 Vrms Max 30 VAC /
60 VDC Max for hand-held

TL-211




Specification: 610mm,PVC
Voltage Rate: 300V CAT II
Current Rate: 5A

TL-212



Specification: 610mm,PVC
Voltage Rate: 300V CAT II
Current Rate: 5A

TP-301



TL-B001



Specification: 50 Ohms
Diameter: BNC
Voltage Rate: 500 V CAT I / 150 V CAT II
Current Rate: 3A

TL-B002



Specification: 50 Ohms
Diameter: BNC
Voltage Rate: 500 V CAT I / 150 V CAT II
Current Rate: 3A

TL-B003



Diameter: BNC / 4mm
Voltage Rate: 500 V CAT I / 150 V CAT II
Current Rate: 3A

TL-B004



Diameter: BNC / 4mm
Voltage Rate: 500 V CAT I / 150 V CAT II
Current Rate: 3A

TL-A001



Diameter: 4mm
Voltage Rate: 1500 VRMS per CATII 300V
Current Rate: 20A

TL-A002



Diameter: 4mm
Voltage Rate: 1500 VRMS per CATII 300V
Current Rate: 20A

TL-A003



Diameter: 4mm
Voltage Rate: 1000 V CAT III
Current Rate: 24A

TL-A004



Diameter: 4mm
Voltage Rate: 1000 V CAT III
Current Rate: 24A

TL-A005



Diameter: 4mm
Voltage Rate: 600 Vrms For CE compliance:
not intended for hand held use
at voltage above 33 Vrms / 70 Vdc
Current Rate: 20A

TL-A006



Diameter: 4mm
Voltage Rate: 600 Vrms For CE compliance:
not intended for hand held use at
voltage above 33 Vrms / 70 Vdc
Current Rate: 20A

TL-A007



Diameter: 4mm
Voltage Rate: 1200 Vrms Max For CE
compliance: not intended for
hand-held use at voltage above
33 Vrms / 70 Vdc
Current Rate: 15A

TL-A008



Diameter: 4mm
Voltage Rate: 1200 Vrms Max For CE
compliance: not intended for
hand-held use at voltage above
33 Vrms / 70 Vdc
Current Rate: 15A

TL-207



Specification: 610mm,PVC
Voltage Rate: 300V CAT II
Current Rate: 5A

TL-208




Specification: 610mm,PVC
Voltage Rate: 300V CAT II
Current Rate: 5A

TL-A009 TL-A010



Diameter: 2mm
Voltage Rate: 33 Vrms or 70 VDC Max
Current Rate: 1A

TL-A011



Diameter: 4mm
Voltage Rate: 5000 Vrms Max. For CE
compliance: not intended for hand-held use at
voltage above 33 Vrms / 70 Vdc
Current Rate: 15A

TL-A012




Diameter: 4mm
Voltage Rate: 2500 Vrms Max. For CE
compliance: not intended for hand-held use at
voltage above 33 Vrms / 70 Vdc
Current Rate: 15A

TL-A013



Diameter: 4mm
Voltage Rate: 2500 Vrms Max.
For CE compliance: not intended for
hand-held use at voltage
above 33 Vrms / 70 Vdc
Current Rate: 15A

TL-A025



TL-209



Specification: 610mm,PVC
Voltage Rate: 300V CAT II
Current Rate: 5A

TL-B011


Specification: 50 Ohms
Diameter: BNC
Voltage Rate: Shield/Earth: 30 VAC / 60 VDC
MaxInner conductor/Shield:
500 Vrms Max

TL-A018


Diameter: $\Phi 4\text{mm}$
Voltage Rate: 600 Vrms For CE compliance:
not intended for hand held use
at voltage above 33 Vrms /
70 Vdc
Current Rate: 20A

TL-A019


Diameter: $\Phi 4\text{mm}$
Voltage Rate: 600 Vrms For CE compliance:
not intended for hand held use
at voltage above 33 Vrms /
70 Vdc
Current Rate: 20A

TL-A020


Diameter: $\Phi 4\text{mm}$
Voltage Rate: CAT III 1000
Current Rate: 20A

TL-A021


Diameter: $\Phi 4\text{mm}$
Voltage Rate: CAT III 1000
Current Rate: 20A

TL-205


Specification: 1200mm
Voltage Rate: CAT III 1000
Current Rate: 10A

TL-206


Specification: 1200mm
Voltage Rate: CAT III 1000
Current Rate: 10A

TL-217

TL-A023


Diameter: $\Phi 4\text{mm}$
Voltage Rate: CAT III 1000
Current Rate: 10A

TL-A022


Diameter: $\Phi 4\text{mm}$
Voltage Rate: CAT III 1000
Current Rate: 10A

TP-303

TP-305

TP-302

AT-55

TR-73

TR-72

AD-2

HC-6605

HC-150

HC-8920


F-0.2A/250V



F-0.5A/250V



F-10A/250V



F-10A/250V



F-500mA/1000V



F-10A/1000V



F-800mA/600V



F-200mA/600V



AD-1



AD-2



C-80



C-118



C-68



C-616



HC-8



HC-8818



HC-8852



C-5300



C-5500



MC-1



DT-72T1/72DP/72A/72H/72TH/72S/72I/72MC/72MR/72L

Environment Meter Probes with Bluetooth

CEM

DT-72T1 Thermometer Specifications

Temperature Range	-50 to 150°C/-58 to 302°F
Accuracy	±1.0°C/1.8°F
Resolution	0.1°C/°F

DT-72DP Differential Pressure Meter Specifications

Measuring Range	-150 to 150hPa
Accuracy	±0.3%FSO (25°C)
Resolution	0.01hPa

DT-72MC Pinless Moisture Meter Specifications

Measuring Range	0.0 to 100.0
Penetration Depth	20 to 40mm
Resolution	0.1

DT-72MR Contact Hygrometer Specifications

Wood moisture (contact and probe)	
Range	6 to 99.9
Accuracy	±2 (6% to 60%), ±4 (60% to 99.9%)
Resolution	0.1

DT-72A Vane Anemometer Specifications

Function	Range	Resolution	Accuracy
m/s(meter per second)	0.4 to 25.0m/s	0.1m/s	±3.5%±0.2m/s
Air Temperature	-20 to 60°C	0.1°C/°F	±0.8°C, (-20 ~ 0°C)
	-4 to 140°F		±0.5°C, (0 ~ 60°C)
Relative Humidity	0 to 100%RH	0.1%RH	±3.5%RH @20~80%RH
			±5%RH @0~20%RH&80~100%RH

DT-72H Hot Wire Anemometer Specifications

Function	Range	Resolution	Accuracy
m/s(meter per second)	0.00 to 30.00m/s	0.01m/s	±5%±0.1m/s, (0~5m/s)
Air Temperature	-20 to 60°C	0.1°C/°F	±0.8°C, (-20 ~ 0°C)
	-4 to 140°F		±0.5°C, (0 ~ 60°C)
Relative Humidity	0 to 100%RH	0.1RH	±3.5%RH @20~80%RH
			±5%RH @0~20%RH&80~100%RH

DT-72TH Temperature & Humidity Meter Specifications

Function	Range	Resolution	Accuracy
Air Temperature	-20 to 60°C	0.1°C/°F	±1°C/2°F
	-4 to 140°F		
Relative Humidity	0 to 100%RH	0.1RH	±3.5%RH @20~80%RH
			±5%RH @0~20%RH&80~100%RH

DT-72I Infrared Thermometer Specifications

Function	Range	Resolution	Accuracy
IR Temp. Range	-30 to 250°C -22 to 482°F	0.1°C/°F	±1.5°C ±1.5 %
D:S	10:1		

DT-72S Sound Level Meter Specifications

Function	Range	Resolution	Accuracy
Frequency	31.5Hz~8kHz	0.1Hz	
Level	30dB~130dB	0.1dB	±1.5db(ref94dB@1kHz)

DT-72L Light Meter Specifications

Function	Range	Resolution	Accuracy
Light	40,000Lux /Fc	0.1Lux/0.1Fc	±4%±10d(<10,000Lux)
Measuring Rate	1 times/second		

Size(HxWxD): 110mm x 30mm x 20mm Weight: 180g

Accessories : 3x1.5V "AAA" batteries.



EMC
EN: 61326



Model 72DP

Model 72MC

Model 72H

Model 72T1

Model 72L


Model 72A

Model 72MR

Model 72S

Model 72I

Model 72TH

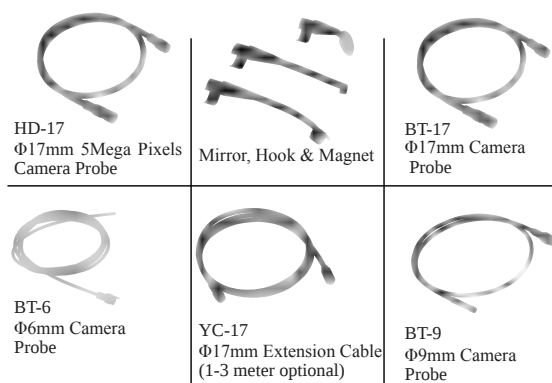

Rechargeable lithium battery

DP-50 probe Specifications

Function	Range	Resolution	Accuracy
Relative Humidity	0 to 100%	0.01	RH<5%±(0.025%RH+17.5%rdg) RH>5% ±(1%RH+5%rdg) RH>15% ±(2%RH+3%rdg)
Dew point	-50~30 °C (-58~86 °F)	0.01	-40...+20°C ±2°C (±3.6°F)
Temperature	-10~ 60 °C (14 ~140 °F)	0.01	-10 ... +50 °C (+14 ... +122 °F) ±0.3°C(±0.54 °F) rest of range ±0.4°C(±0.72 °F)
Dew point response time : flow rate 0.2 m/s, 1 bar pressure, +20 °C (+68 °F) 63% [90%] 0 -> -40 °C Td (32 -> -40 °F Td) 20 s [120 s] -40 -> 0 °C Td (-40 -> 32 °F Td) 10 s [20 s]			

DP-60 probe Specifications

Function	Range	Resolution	Accuracy
Dew point	-70 ~ 30 °C (-94 ~ 86 °F)	0.01	-60 ~ +20 °C ±2 °C (±3.6 °F)
Relative Humidity	0 ~ 100%	0.01	RH<5% ±(0.025%RH+17.5%rdg) RH>5% ±(0.8%RH+2%rdg)
Temperature	-10 ~ 60 °C (14 ~ 140 °F)	0.01	±0.2°C (±0.36 °F)
Dew point response time: flow rate 0.2 m/s, 1 bar pressure, +20 °C (+68 °F) 63% [90%] 0 -> -60 °C Td (32 -> -76 °F Td) 50 s [340 s] -60 -> 0 °C Td (-76 -> 32 °F Td) 10 s [20 s]			

IR-82 InfraRed Thermometer Probe

- 8:1 Distance to Spot size ratio
- Built-in laser pointer
- Built-in Analog output of 1 mV/°C or °F & °C/°F switchable
- Compatible with multimeters, clamp meters, oscilloscope and industrial applications etc
- Ideal for applications where object being measured cannot be touched
- Provides instant , highly repeatable readings & Low battery indication

Specifications

Range	-35°C to 550°C/ -31°F to 1022°F
Response Time	Less than 500ms
Resolution	1mV/°C or °F
Basic Accuracy	±2% or ±2°C/±4°F
Optical Resolution	8:1
Emissivity	Fixed at 0.95
Battery	9V

Distance (D) to Spot size(S)

D:S=8:1



(Unit: mm)

Size(HxWxD): 166mm x 53mm x 40mm

Weight: 189g


Accessories : 9V battery, Clamshell



EMC
EN: 61326
EN: 60825-1



Model IR-82

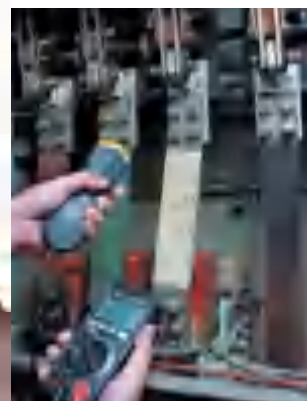



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +375-257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: mce@nt-rt.ru || сайт: <https://cem.nt-rt.ru/>